




A. Features

- > 12 Digits LCD Display, Display Hour, Minute, Second, Month, Day and Week
- > Daily Alarm and Chime hourly
- > Snooze
- > 12 / 24H format selectable
- > 1/100 second Chronograph with split functions
- > EL backlight

B. Operational Manual

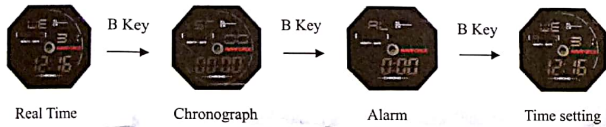

1. At any state, press A key EL backlight for 3s.

2. Chronograph


- > The display range of the stopwatch is 23 hours, 59 minutes, 59.99 seconds.
- > The stopwatch continues to run, restarting from zero after it reaches its limit, until you stop it.
- > The stopwatch measurement operation continues even if you exit the Stopwatch Mode.
- > Exiting the Stopwatch Mode while a split time is frozen on the display clears the split time and returns to elapsed time measurement.

> To measure times with the stopwatch:


Elapsed time



Split time



Two Finishes



3. Daily Alarm

- > Turn On / Off Alarm and Chime
 Press D key to turn on/off Alarm (AL ◀) or Chime (CH ◀)
- > Alarm setting : Press C key to select "Hour" or "Minute" setting, Press D key to adjust the flashing item, Press C key to confirm, Press B key to return to Real Time mode.
- > Alarm Snooze ON/OFF
 At Alarm sounding state, press C key or D key to stop sounding, and press B key to ON/OFF snooze function. When Snooze function be ON, it will sound five minutes later, and auto stop after sounding for 20 Second.

4. Time Setting

- > "Second" flashing when loading, press D key to zero ; Press C key to select item as following sequence :
 Hour → Minute → Month → Day → Day of Week → Second
- > Press D key to adjust the flashing item.
- > Press B key to exit the setting screen and update the remainder time automatically.
- > When setting "Hour", "H" display for 2 4 H format, "A" or "P" for 1 2 H format .

C. Specifications

- > Module Size : Φ36.2mm
- > Module Thickness (include buzzer) : 9.30mm
- > Operational Temperature Range : 0°C-50°C
- > Operational Voltage : 3.0V
- > Accuracy : ±90sec/month
- > Battery Code : CR2025(capacitance: 170m Ah)
- > static average current : ≤1.53u A (static maximum current : 4.0uA)
- > Alarm average current : ≤0.97m A (Alarm maximum current : 4.0mA)
- > EL lighten average current : ≤7.51m A (EL lighten maximum current : 10.0mA)
- > Battery life (85%) : ≥24 month

Under the following conditions:(4 backlight operation (3 seconds) perday; 60 seconds of alarm operation per day)

