

# INSTRUCTION

## Baseus Super Energy Car Jump Starter

please read this instructions completely and keep it properly

### 1.Product Parameter

Brand: Baseus

Name: Car Jump Starter

Model: CRJS01

Capacity: 8000mAh / 3.7V / 29.6Wh

Rated output capacity: 4900mAh

Input: 5V $\pm$ 2.1A(Max)

USB Output: 5V $\pm$ 2.4A (Max)

Start Voltage: 12V

Start Current: 400A

Peak Current: 800A

Size: 160\*85\*28.8mm

Weight: About 372g

Suitable models: gasoline vehicles with a displacement of less than 4.0 L or diesel vehicles with a displacement of less than 2.5 L

### 2.Product description

This product is a car emergency start-up power supply, which can provide emergency ignition for cars cannot be started due to loss of car battery. It also supports 5V $\pm$ 2.4A output and can be used to charge most mobile phones and tablets.

### 3.Package List



1) Jump starter\*1



2) Charging cable\*1



3) User Manual\*1




4) Warranty card\*1



5) Intelligent ignition clamp\*1

### 4.Product display figure

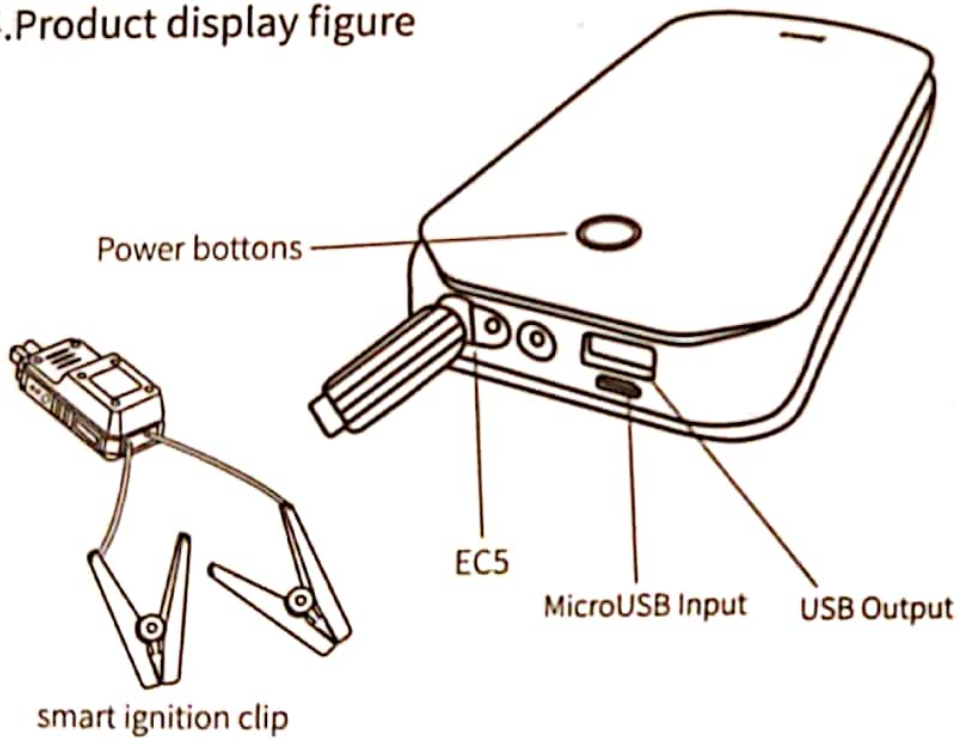

### 5.Product display figure

#### Jump Starter instruction

- 1) Insert the smart ignition clip into the EC5 interface of the startup power supply, and the red and green lights of the smart clip will flash alternately;
- 2) Open the hood of the car and clip the smart clip to the car battery accordingly (the positive pole of the ignition clip corresponds to the positive pole of the car battery, and the negative pole of the ignition clip to the negative pole of the car battery)
- 3) Go back to the car and start the car;
- 4) Remove the start-up power immediately after starting the car.


#### Lighting instruction

Long press the power button 3S to turn on the lighting function, then short press to enter SOS mode, then short press to enter flash mode, and then press to turn off the light.

## 6. Safety information

- 1) In order to prevent leakage, fever and explosion of batteries, please pay attention to the following safety precautions.
- 2) The portable power supply selects high quality polymer battery and you can use it at ease.
- 3) Don't throw and separate it or impale the power supply by yourself; be sure not to expose the power into fire, high temperature or water; it's suggested that user should use power adapter which comes with phone or is standard brand for charging the power supply. If there are any ballooning phenomenon, please stop to use.
- 4) In the process of charging or discharging, the power supply has proper heating phenomenon; the heating temperature is below 40°C and without influencing products performance. User can use it at ease.
- 5) Please charge your power bank periodically (at least one time with 5 months recommended) in order to maintain its long service life.
- 6) Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- 7) The Company will not be liable for any personal and property damage caused by the consumer's inappropriate use or warning in violation of the product description.

## 7. Declaration on Toxic or hazardous substances and elements contained in electronic products

Part Description	Toxic or hazardous substances and elements 					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
PCB	X	○	○	○	○	○
Electrode	○	○	○	○	○	○
Battery	X	○	○	○	○	○
Casing	○	○	○	○	○	○

O: Indicates that contents of the toxic and hazardous substances in all homogeneous materials are below the limit requirements specified by GB/T 26572 standard.

X: Indicates that contents of the toxic and hazardous substances exceed the limit requirements specified in GB/T 26572 standard in at least one homogeneous material of the part.

The information provided in this form is based on the data provided by the supplier and in line with the detection result of ROHS environmental requirements. At the current level of technology, use of all toxic and hazardous substances or elements is controlled to the bottom line, but immunity of EU ROHS directive is followed. Environmental protection limit lasts 5 years.

Shenzhen Times Innovation Technology Co.,Ltd.

Add: 5th Floor, Building B, Baseus Intelligence Park,  
No.2008, Xuegang Rd, Gangtou Community,  
Bantian Street, Longgang District, Shenzhen

TEL:+86 755-82433603 Website: [www.baseus.com](http://www.baseus.com)



PB2149Z

Designed by Baseus

Made in China



合同会社三合

## Warranty Policy

Within warranty valid period, you can enjoy the service of sales return, exchange goods, maintenance.

1. Return goods without reason within 7 days from the date of receipt, exchange goods free of charge within 15 days. In the date of receipt, it is suitable for products (banned such as Time 12). The shipping fee will be paid by you. Please send the return or exchange goods with the quality issue. The shop where you bought products will pay shipping fee for related products. Please send original invoice, tax ticket and presents.
2. If you buy products in your local store, you can enjoy replacement service within 15 days from the date of purchase in your local service center. If there is no after-sales service center, you can send the products to authorized dealer for exchange service.
3. The products you purchased after being tested and determined by the company, can enjoy the warranty service according to the following schedule of after-sales service commitment.

Product Type	Service Policy	Service Mode
Bluetooth Products & Audio Products	Product quality reasons within 12 months from the date of receipt	Users delivery for repair
Power Bank & Adapter	Product quality reasons within 12 months from the date of receipt	Users delivery for repair
Cables & Car Mounts	Product quality reasons within 3 months from the date of receipt	Users delivery for repair

Random accessories, not covered by warranty

## Non Warranty Regulations

1. Unauthorized repair, misuse, collision, negligence, abuse, accident, alteration, or tearing, alteration of stickers, anti-counterfeiting marks;
2. The original serial number label of the product has the phenomenon of alteration, replacement, tearing, etc., or the product does not have a serial number, and the product model number and serial number on the warranty certificate do not match the actual product;
3. The product exceeds the warranty period specified by the company;
4. Abnormal use of the product causes damage to the appearance;
5. The outer packaging part and the attached gifts, services other than the products promised by the salesperson and additional configurations and gifts;
6. Improper storage performance damage caused by long-term exposure of the product to abnormal humidity and temperature;
7. Failure to follow the operating instructions, human misuse and unauthorized modification caused damage to the product;
8. Damage caused by force majeure.

Dear users,

Thank you very much for using Baseus products. We will provide quality products and after-sales services for you. The consumer rights are our obligations. Therefore, the company implements the following standard warranty service terms in accordance with relevant state regulations.

For your rights, please fill in carefully and keep it as a certificate before maintenance.

## Dealer's information

Product Type \_\_\_\_\_ Dealer Name \_\_\_\_\_  
 Contact Telephone \_\_\_\_\_ The date of purchase \_\_\_\_\_

## Users information

User's Name \_\_\_\_\_ Contact Telephone \_\_\_\_\_  
 Postal Address \_\_\_\_\_ E-mail \_\_\_\_\_

Warranty Content

Warranty Date

Please keep this warranty card and valid enough proof of purchase as a warranty certificate. Do not modify the content without authorization, otherwise it will be considered invalid. The company reserves the right to interpret the product after-sales service regulations.

TEL: +86 755-82433603

WEB: [www.baseus.com](http://www.baseus.com)